

BEVEL GEARBOX. PART NO: 919D24

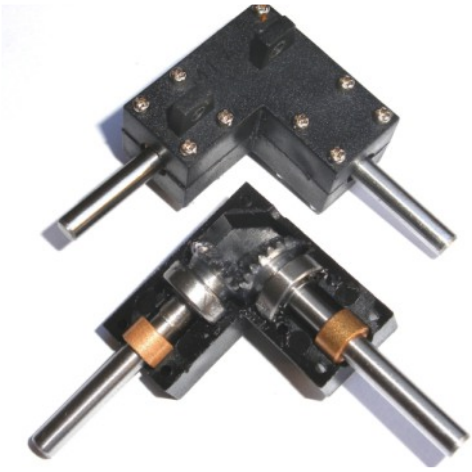

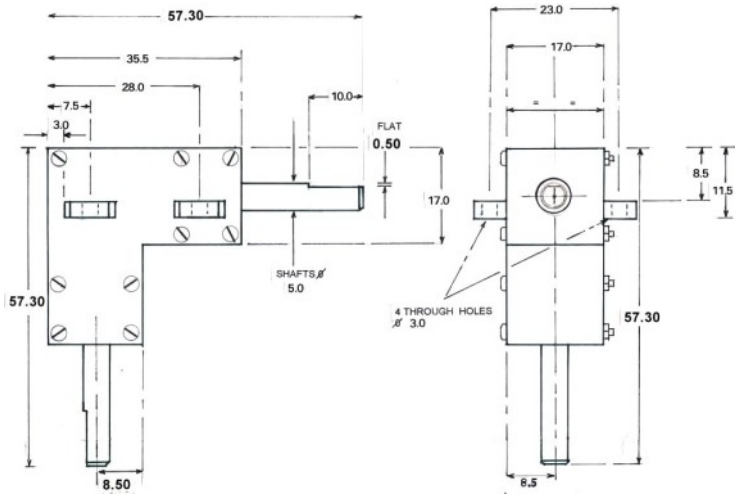

This unit has steel gears and shafts running in ballraces and scintered bronze bearings, 1 ball race and sintered bearing per s haft. The former act also as thrust races protecting the bevel gears from external pressures of varying loads. The housing mouldings are 30% glass filled nylon for strength and have four pre-drilled mounting holes. Key flats are provided on both shafts.

1:1 gear ratio **Lubricated for life** **Designed for rugged service life**

SPECIFICATION:	**Weight:**	**42g**	**Backlash:**	**1 deg approx**	**Max input speed:**	**5000 r.p.m.**
MATERIAL:	**Case:**	**30% glass filled nylon**			**Gear Material:**	**FC-0208-HT**

IN-LINE COUPLINGS



5 - 5mm **Part No. 919D1/5**

5 - 6mm **Part No. 919D1/3**

1 Llwyn Bleddyn, Llanllechid, Bangor, LL57 3EF, UK
TEL: 01304 612132
EMAIL: info@mfacomo.com
WEB: www.mfacomodrills.com

THE ABOVE FIGURES ARE A GUIDE ONLY AND DO NOT FORM ANY CONTRACTUAL OBLIGATION ON THE PART OF MFA/COMO DRILLS.