


# GP Batteries

**Data Sheet**


**Model No.: GP321**

Description : Silver Oxide Low Drain Button Cell  
 Nominal Voltage : 1.55 Volts  
 Dimensions :  $\varnothing 6.80 \times 1.65\text{mm}$   
 Application : Analog watch  
 Average Weight : 0.28g  
 Storage loss at 23°C : Less than 5% in 1 year.  
 Storage loss at 60°C : Less than 5% in 20 days.  
 Initial Service Life : 700 hrs (15k $\Omega$ )  
 (at 23°C)

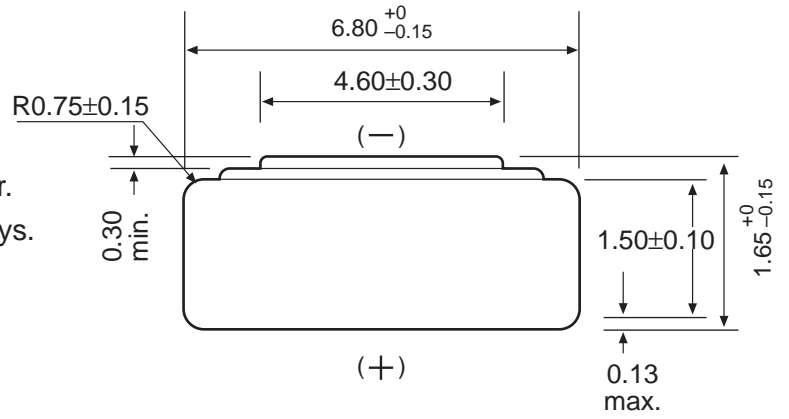

Unit : mm

## Discharge Curve

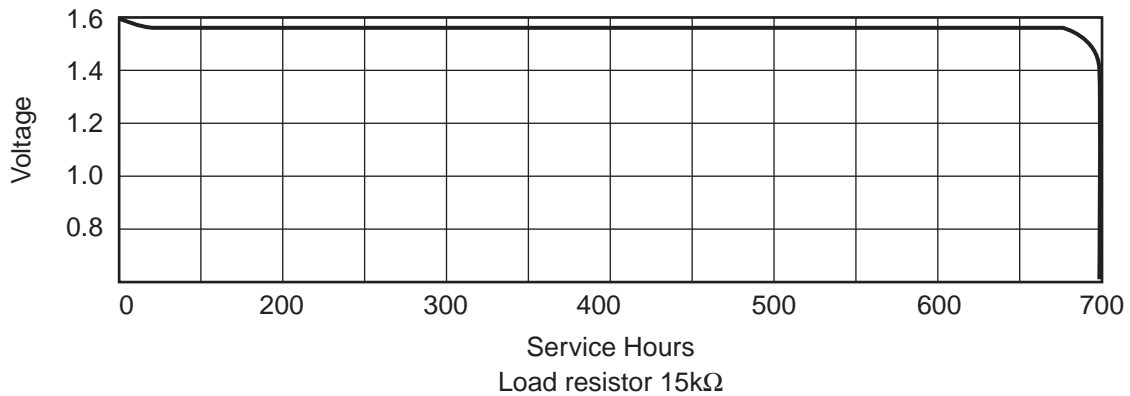

Average Service Capacity:  
 16 mAh (rated capacity at 68k $\Omega$  load,  
 cut off voltage 1.3V at 24°C)

Close circuit voltage:  
 0.85 Volts (min.) (load resistor 100 $\Omega$  at  
 23°C for 2 seconds)

## Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR65	SR65	321	V321	D321	SP321	SR616SW